


VERGE FLASHING OPTIONS

Section Key:

1. Aluminium verge flashing.
2. Secure verge clip to halter with 2 no. stainless steel self tapping screws TDC-S 6.3mm x 19mm long with 16mm EPDM stainless steel washer or SX2.
3. Rivet verge channel to PROZIP roof sheet at 300 c/c. Rivets must be clear of aluminium halter. Use 4.8mm diameter x 12mm long aluminium rivets with a stainless steel mandrel, blind sealed type. Do not rivet adjacent to halter.
4. PROZIP roof sheet module 300mm or 400mm.
5. Tolerance verge detail.

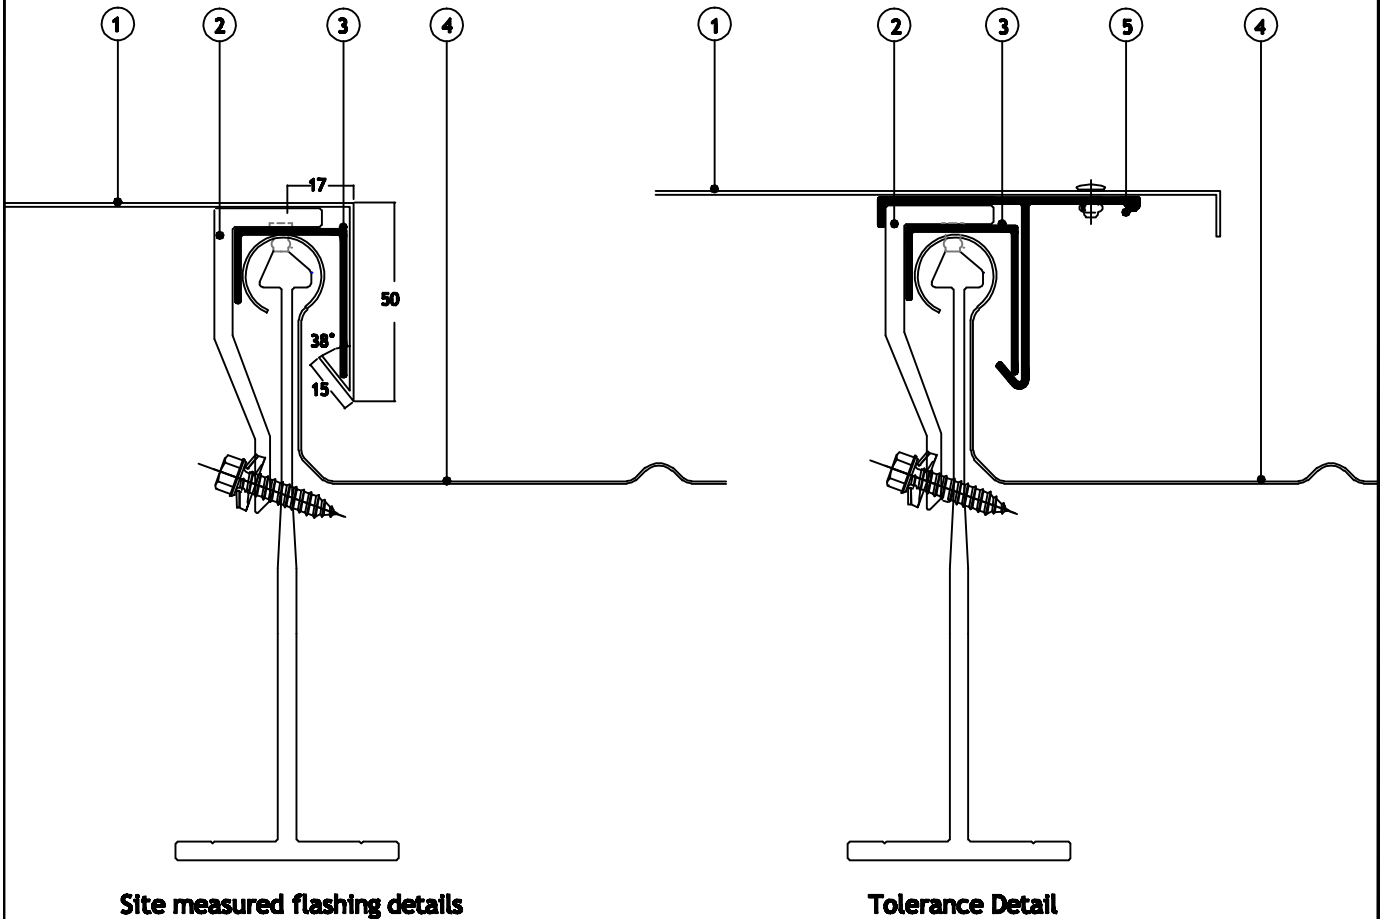

Site measured flashing details

Tolerance Detail



The **BRADCLAD** Group
 The Old Station
 Nidd
 Harrogate
 HG3 3BN
 United Kingdom
 Telephone 0044 1423 779555
 Website www.bradclad.com

Drawing title:
**PROZIP Roofing System
 Verge Flashing Components**

Detail is valid only when approved by the Architect / Contractor concerned

Drawing No:
PZ-V001

Scale:
1:2

Revision:
A

Date:
JULY-2011

Copyright reserved ©